

# GALACTUS™

CLEAR / SMOKE / INDOOR OUTDOOR

## TECHNICAL SPECIFICATION

PRODUCT CODE: ASA480-0\_\_ - \_00

ADAPTABLE AND ULTRA LIGHT SAFETY SPECTACLE WITH BASE 10 LENS

EYE & FACE PROTECTION

### INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

**FRAME:**  
Thermoplastic Rubber

**INNER FRAME:**  
Polymer

**SCREW:**  
Nickel Alloy

**NOSE PIECE:**  
Nylon & TPE

**LENS:**  
Polycarbonate

G A L A C T U S™

### GALACTUS™ FEATURES & PERFORMANCE

Elastomer-injected sleeve for improved comfort and adhesion

Polymer inner structure for more flexibility and comfort

Adaptable floating nose bridge

Ultra-light frame - Reducing heavier plastic with an overmould TPR reduces overall weight.

Ergonomically designed contoured arms for comfort and stability.

Base 10 lens provides maximum field of view and protective coverage.

Cushioned nose pads for improved comfort and better grip.



MistResist™

### CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

### CONFORMITY

Conforms to EN 166.1.FT. & ANSI Z87.1

EC Type-Examination Certificate Number 682745

**DISCLAIMER:** Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jsp.co.uk](mailto:technical@jsp.co.uk).



MANUFACTURING FOR SAFETY  
[WWW.JSP.CO.UK](http://WWW.JSP.CO.UK)



UKSALES@JSP.CO.UK  
TEL: +44 (0)1993 826050



Issued 14/08/18, V3

PRODUCT CODE: ASA480-0\_\_ - 00

ADAPTABLE AND ULTRA LIGHT SAFETY SPECTACLE WITH BASE 10 LENS

EYE & FACE PROTECTION

### DIMENSIONS OF SPECTACLE


|   |
|---|
| Lens Thickness: 2.2mm                   |
| Lens Base: 10                           |
| Lens Size (Diagonal): 79mm              |
| Bridge: 15mm                            |
| Temple Length (Lens to tip): 165mm      |
| Overall Width: 149mm                    |
| Closest point between lens: 15mm        |
| Closest point between temple tips: 89mm |
| Weight: 30g                             |

### GALACTUS™ MODELS AVAILABLE

|  |
|--|
| Clear Lens: Anti-Scratch & Anti-Mist, KN |
| Smoke Lens: Anti-Scratch & Anti-Mist, KN |
| Indoor/Outdoor: Anti-Scratch & Anti-Mist |

### DIMENSIONS OF OUTER PACKAGING

|                         |
|-------------------------|
| Quantity: 120           |
| Weight: 6.3kg (Approx.) |

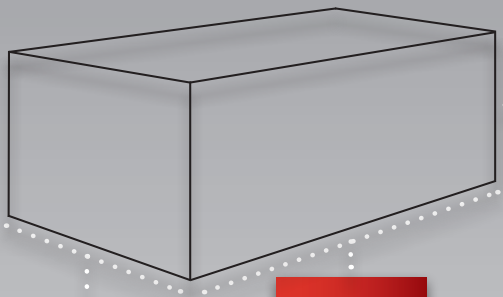

HEIGHT:  
455mm

WIDTH:  
510mm

LENGTH:  
290mm

### LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

Galactus is not suitable for protection against dusts, liquids or molten metals

### MARKINGS

|                      |        |   |          |
|----------------------|--------|---|----------|
| Frame: EN166 1.FT    |        |   |          |
| Clear Lens:          | 2C-1.2 | ↑ | 1.FT.K.N |
| Smoke Lens:          | 5-2.5  | ↑ | 1.FT.K.N |
| Indoor/Outdoor Lens: | 5-1.7  | ↑ | 1.FT     |



**DISCLAIMER:** Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jsp.co.uk](mailto:technical@jsp.co.uk).